MATRIX
TELECOM SOLUTIONS

SETU ATA211

VoIP-FXS-FXO Gateway

User Card

Know Your SETU ATA211

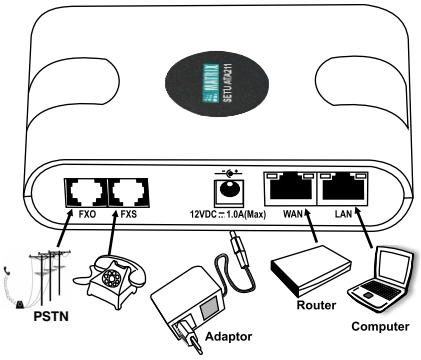

Making/Receiving Calls

Making Calls (Note 6)

- Go OFF-Hook.
- Dial the Number.
- Talk.

Making Calls using Speed Dialing (Note 1)

- Go OFF-Hook.
- Dial #9-Index Number.
- Talk.

Making New Calls (Note 4, 6)

- Active Call.
- Dial #81.
- Dial the Number.
- Talk.

Disconnect the Call (Note 4)

- Active Call.
- Dial #82.
- Error Tone.

Making Calls using-FXO (Note 5, 6)

- Go OFF-Hook.
- Dial #83.
- Dial the Number.
- Number will be dialed from FXO.

Making Calls using-SIP1 (Note 5, 6)

- Go OFF-Hook.
- Dial #84.
- Dial the Number.
- Number will be dialed using SIP1.

Making Calls using-SIP2 (Note 5, 6)

- Go OFF-Hook.
- Dial #85.
- Dial the Number.
- Number will be dialed using SIP2.

Making Calls using-SIP3 (Note 5, 6)

- Go OFF-Hook.
- Dial #86.
- Dial the Number.
- Number will be dialed using SIP3.

Receiving Calls

- Ring for IC Call.
- Go OFF-Hook.
- Talk.

Managing Calls

Call Hold (Note 5)

- Dial Flash to Hold.
- Dial Flash again to Retrieve the held call.

Making Second Call (Note 5)

- Active Call.
- Dial Flash-Number String.

Call Waiting (Note 5)

When you have one active call and one waiting call

- Dial Flash-#3 to Reject waiting call.
- Dial Flash-#4 to Hold current call and answer waiting call.
- Dial Flash-#5 to Disconnect current call and answer waiting call.

Call Transfer (Note 5)

When you have one active call

- Dial Flash-#6-Number String for blind call transfer.
- Dial Flash-Number String-Speech-Dial Flash-#7 for attended Call Transfer.

3-Party Conference (Note 5)

- Speech with Party 1.
- Dial Flash.
- Dial number of Party 2.
- Speech with Party 2.
- Dial Flash-#2 to conduct Conference.
- Dial Flash-#4 to toggle from Conference while in Conference.

Call Toggle (Note 5)

- Dial Flash-#4 when you have one active call and one held call.

MATRIX
TELECOM SOLUTIONS

MATRIX COMSEC PVT. LTD.

Corporate Office:
394-GIDC, Makarpura
Vadodara - 390 010, India
Tel.: +91 265 2630555
Fax: +91 265 2636598
Email: Info@MatrixComSec.com

Factory:
39-GIDC, Waghodia - 391 760
Dist. Vadodara, India
Tel.: +91 2668 262056 / 57

Technical Support:
Tel.: +91 2668 263172/73
Fax: +91 2668 262631
Email: Support@MatrixComSec.com

Website: www.MatrixComSec.com

Version 3, February 2011

Other Features

Programming Mode (Note 5)

To enter programming mode for Admin
- Dial #19-Admin Password (default 1234).

To enter programming mode for User
- Dial #18-User Password (default 1234).

To exit from programming mode
- Dial 0.

Call Forward (CF) (Note 2, 5)

To set Call Forward-Unconditional
- Dial 52-1-#*.

To cancel Call Forward-Unconditional
- Dial 52-0-#*.

To program CF-Unconditional Number
- Dial 51-Destination Number-#*.

To set Call Forward-When Busy
- Dial 54-1-#*.

To cancel Call Forward-When Busy
- Dial 54-0-#*.

To program CF-When Busy Number
- Dial 53-Destination Number-#*.

To set Call Forward-When No Reply
- Dial 56-1-#*.

To cancel Call Forward-When No Reply
- Dial 56-0-#*.

To program CF-When No Reply Number
- Dial 55-Destination Number-#*.

To program CF-No Reply Timer/CF-Timer
- Dial 57-Timer-#*

Do Not Disturb (DND) (Note 2, 5)

To set DND
- Dial 61-1-#*.

To cancel DND
- Dial 61-0-#*.

Caller ID (Note 2, 3)

To send Caller ID
- Dial 66-SIP Trunk-0-#*.

To Block Caller ID
- Dial 66-SIP Trunk-1-#*.

Call Waiting (Note 2, 5)

To set Call Waiting
- Dial 72-1-#*.

To cancel Call Waiting
- Dial 72-0-#*.

Cancel All Features (Note 2, 5)

To cancel all features
- Dial 99-#*.

Notes:
- *Note 1:* The Access Code can be dialed from FXS or FXO or SIP Trunk. Enter the Index number at which the number is programmed in relevant Speed Dial Table for FXS or FXO or SIP.
- *Note 2:* You must be in programming mode to issue command.
- *Note 3:* Only Admin can use this command. 'SIP Account 1 for SIP1, 2 for SIP2 and 3 for SIP3.
- *Note 4:* Applicable for FXS and FXO ports only.
- *Note 5:* Applicable for calls made from FXS port only.
- *Note 6:* While making calls, to avoide delay of Inter Digit Wait Timer before the SETU ATA211 dials the number, you can dial '#' at the end of dialing all digits of the number.

Matrix VoIP Products

SETU ATA2S
VoIP-FXS Adaptor

SAPEX
The All-in-One
Embedded IP-PBX
Server